



INSTRUCTIONS FOR UNPACKING AND PLACEMENT

The sharpening machine is delivered packed in a wooden crate.

During all transport and transfer, the machine must be kept in its original vertical position, any variation in this position may lead to the loss of the guarantee.



Machine model	Packing dimensions (mm)	Gross weight Kg
AVB 851	1970 x 1480 x 2200	780
AVB 850	1970 x 1480 x 2200	780
AVB 750	1720 x 1720 x 2070	690
SVG 850	1970 x 1480 x 2200	780
SVG 750	1720 x 1720 x 2070	690
MVB 850	1920 x 1480 x 2200	780
MVB 750	1720 x 1720 x 2070	630
MVB 670	1720 x 1720 x 2070	630
MVB 650	1720 x 1720 x 2070	630
GBT 851	1970 x 1480 x 2200	790
GBT 850	1970 x 1480 x 2200	780
GBT 750	1570 x 1180 x 1780	520

UNPACKING PROTOCOL



Take special care when lifting the load: The load may not be centered!

To lift or move the load, use a forklift with blades long enough to support the machine, taking into account the width and depth of the machine for the calculation of the weights to lift.



The machine is delivered in a wooden crate, securely bolted to the base of the crate and protected by a plastic wrap.

It is highly recommended to wear protective gloves when handling the wooden crate to prevent injuries from splinters or sharp edges.

Remove the screws securing the sides of the crate to begin the opening process.

Then, remove all four side panels and the top (roof) of the crate to allow for easier access to the machine.



UNPACKING PROTOCOL



The machine is secured to the base of the crate by four hex bolts.

Remove them.

A forklift must be used to move the machine off the crate base and to its final location. Insert the forks into the specific areas indicated by the "forklift" stickers on the machine's frame. Ensure the machine is balanced and secure before lifting.



UNPACKING PROTOCOL



Carefully remove the plastic wrap covering the machine, taking extra care not to scratch the surfaces.

The control panel is packed with extra protection, and the screen is shielded with foam padding. Unpack this section with extreme caution to avoid any damage to the screen.



Foam padding protecting the screen.



Remove the protections before connecting the machine.

UNPACKING PROTOCOL




To plug in the machine, you must access the electrical cabinet located at the rear of it.

Remove the bottom protective cover and connect the plug to the terminals marked with red electrical tape.



Protective cover for the electrical panel.

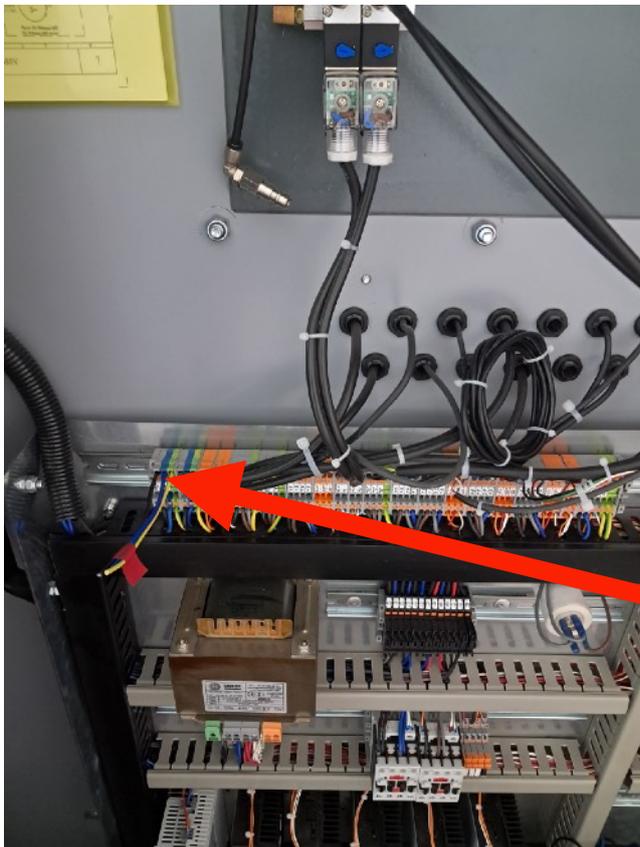

Terminals for plugging the machine.